


# OZAK 台形ネジ・六角すべりスプライン オザック精工(株)


209722

寸法図

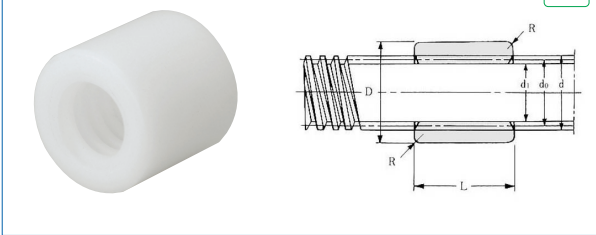

RoHS

寸法図

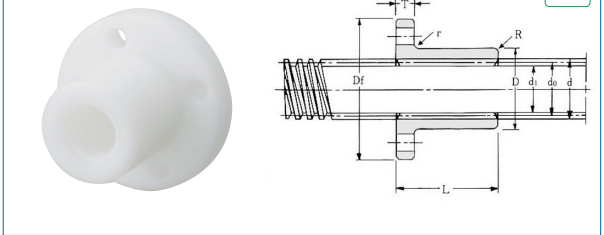

RoHS

**TMS-P形プラスチックナット寸法価格** 材質:ポリアセタール

型番	TMS-P		主要寸法 (mm)			
	右ネジ	左ネジ	P	D	L	R
TMS10P	1,400	1,400	2	20	20	1
TMS12P	1,600	1,600	2	22	22	1
TMS14P	1,700	1,700	3	22	22	1
TMS16P	2,000	2,000	3	28	26	1
TMS18P	2,500	2,500	4	32	31	1.5
TMS20P	2,600	2,600	4	32	31	1.5
TMS22P	3,000	3,000	5	36	40	1.5
TMS25P	3,400	3,400	5	36	40	1.5
TMS28P	4,300	4,300	5	44	45	2
TMS32P	4,400	4,400	6	44	45	2
TMS36P			6	52	49	2
TMS40P			6	58	57	2

**TMF-P形プラスチックナット寸法価格** 材質:ポリアセタール

型番	TMF-P		主要寸法 (mm)							取付	
	右ネジ	左ネジ	P	D	Df	L	T	PCD	穴		
TMF10P	2,000	2,000	2	20	36	24	8	26	4.3		
TMF12P	2,600	2,600	2	22	44	30	8	31	5.4		
TMF14P	2,700	2,700	3	22	44	30	8	31	5.4		
TMF16P	3,500	3,500	3	28	51	35	9	38	6.6		
TMF18P	4,300	4,300	4	32	56	40	9	42	6.6		
TMF20P	4,400	4,400	4	32	56	40	9	42	6.6		
TMF22P	5,600	5,600	5	36	61	50	10	47	6.6		
TMF25P	6,200	6,200	5	36	61	50	10	47	6.6		
TMF28P	8,700	8,700	5	44	76	56	11	58	9		
TMF32P	8,800	8,800	6	44	76	56	11	58	9		
TMF36P			6	52	84	60	11	66	9		
TMF40P			6	58	98	70	13	76	11		

**TM-S形右ネジステンレス軸価格** 材質:SUS303

型番ネジ軸	主要寸法 (mm)				ネジ軸長さ (mm)			
	軸径	有効径	谷径	リード角	500	1000	1500	2000
TM10S	10	9	7.5	4°03'	5,100	9,200		
TM12S	12	11	9.5	3°19'	5,800	10,300		
TM14S	14	12.5	10.5	4°22'	6,600	12,000		
TM16S	16	14.5	12.5	3°46'	8,800	15,800	23,700	28,700
TM18S	18	16	13.5	4°33'	10,400	18,700	28,000	33,700
TM20S	20	18	15.5	4°03'	12,500	22,500	33,700	40,600
TM22S	22	19.5	16.5	4°40'	14,300	25,800	38,700	46,700
TM25S	25	22.5	19.5	4°03'	18,900	34,200	51,300	61,900
TM28S	28	25.5	22.5	3°34'	22,700	41,000	61,500	74,400
TM32S	32	29	25.5	3°46'	28,000	50,900	76,400	92,500

**TM-SL形左ネジステンレス軸価格** 材質:SUS303

型番ネジ軸	主要寸法 (mm)				ネジ軸長さ (mm)			
	軸径	有効径	谷径	リード角	500	1000	1500	2000
TM10SL	10	9	7.5	4°03'	6,300	11,200		
TM12SL	12	11	9.5	3°19'	7,100	12,400		
TM14SL	14	12.5	10.5	4°22'	8,100	14,500		
TM16SL	16	14.5	12.5	3°46'	10,700	19,300	28,600	34,400
TM18SL	18	16	13.5	4°33'	12,700	22,600	33,600	40,800
TM20SL	20	18	15.5	4°03'	15,100	28,300	40,800	48,800
TM22SL	22	19.5	16.5	4°40'	17,300	31,200	46,500	56,400
TM25SL	25	22.5	19.5	4°03'	22,800	41,000	61,900	74,500
TM28SL	28	25.5	22.5	3°34'	27,400	49,400	74,200	89,500
TM32SL	32	29	25.5	3°46'	33,900	61,200	91,900	111,400

寸法図



RoHS

HTS形 BC-6)

HTS-P形 (PET系樹脂)


**HTS形・HTS-P形 プラスチック六角すべりスプラインナット**

型番	HTS形 BC-6	HTS-P形 プラスチック	ナット外形		キー溝寸法		
			外径	長さ	幅	深さ	長さ
HTS 7	3,100	3,900	14	14	3	1.5	10
HTS 9	3,300	4,000	18	18	4	2	12
HTS11	3,600	4,600	21	22	4	2	16
HTS13	3,700	4,800	24	26	4	2	18
HTS17	4,300	5,900	30	34	5	2.5	22
HTS22	6,000	8,100	36	44	7	2.5	28
HTS27	7,300	11,000	44	54	7	2.5	36
HTS32	8,200	16,900	54	64	10	4	42

**HT形六角軸価格** 材質:S45C

型番	対辺寸法	六角軸長さ (mm)			
		500	1000	1500	2000
HT 7	7	2,500	3,100		
HT 9	9	2,500	3,100		
HT11	11	2,700	3,300		
HT13	13	2,800	3,600		
HT17	17	4,200	5,500	6,800	8,100
HT22	22	5,300	6,800	8,700	10,400
HT27	27	7,700	10,400	12,500	15,200
HT32	32	9,200	13,000	16,300	20,000

寸法図

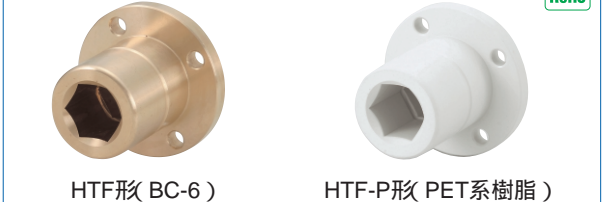

RoHS

HTF形 BC-6)

HTF-P形 (PET系樹脂)

**HTF形・HTF-P形 プラスチック六角すべりスプラインナット**

型番	HTF形 BC-6	HTF-P形 プラスチック	フランジ		ナット外形		取付穴	
			外径	厚み	外径	全長	PCD	穴
HTF 7	3,300	4,300	26	3	14	16	20	3.5
HTF 9	3,600	4,600	30	4	18	20	24	3.5
HTF11	4,100	5,900	37	5	21	26	29	4.5
HTF13	4,300	6,200	40	5	24	30	32	4.5
HTF17	5,900	9,000	50	6	30	40	40	5.5
HTF22	8,600	12,900	56	8	36	50	46	5.5
HTF27	11,900	19,800	66	8	44	60	55	6.6
HTF32	14,900	27,200	76	10	54	70	65	6.6

**HT-S形ステンレス六角軸価格** 材質:SUS304

型番	対辺寸法	六角軸長さ (mm)			
		500	1000	1500	2000
HT 7S	7	2,900	4,000		
HT 9S	9	3,200	4,600		
HT11S	11	3,800	5,400		
HT13S	13	4,200	6,300		
HT17S	17	6,400	9,700	13,300	16,700
HT22S	22	8,800	14,000	19,400	24,700
HT27S	27	13,400	22,000	29,900	38,400
HT32S	32	16,800	28,300	39,200	50,500



空圧・油圧・真空  
直動システム・関連  
2  
ロボット・FA  
制御・検出・計測  
駆動・回転  
軸受・素材・機械  
動力伝達・伝動  
搬送・運搬  
ポンプ・送風機・粉体  
工場設備・環境