

ノーヒューズ遮断器・漏電遮断器

三菱電機(株)

103431

空圧・油圧・真空

直動システム・関連

ロボット・FA

制御・検出・計測

4

駆動・回転


軸受・素材・機械

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体


工場設備・環境

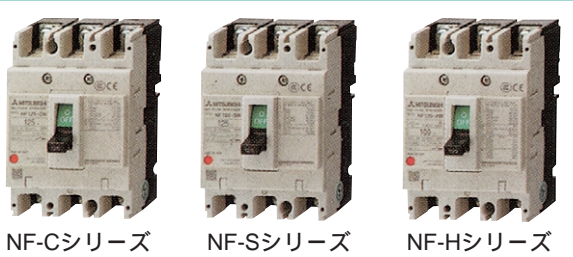

NF-Cシリーズ NF-Sシリーズ NF-Hシリーズ

NF形ノーヒューズ遮断器S、Hシリーズ(汎用品、高性能品)

形名	極数 P	価格	定格電流 (A)	遮断容量 (kA) 230V於	外形寸法	
					ヨコ	タテ
NF32-SW	2	5,900	3 5 10 15	7.5	50	130
	3	8,480	20 30		75	
NF63-SW	2	10,700	(3) (5) 10 15	15	50	130
	3	14,500			75	
	4	21,800			100	
NF63-SW	2	13,100	60 (63)	15	50	130
	3	18,400			75	
	4	27,680			100	
NF50-HRW	2	28,800	15 20 30 40 50	85	90	130
	3	36,000			100	
NF50-HCW	3	23,500	3 5 8 10	100	75	150
NF125-SW	2	28,800	15 20 30 40 50	50	60	130
	3	36,000			90	
	4	54,000			120	
NF125-SW	2	39,140	125	50	60	130
	3	53,120			90	
	4	79,970			120	
NF125-HW	2	36,100	15 20 30 40 50	100	60	130
	3	49,500			90	
	4	74,300			120	
NF100-HEP	3	81,700	15 20 30 40	100	90	155
	4	122,600			120	
NF250-SW	2	49,000	(100) 125 150	50	105	165
	3	66,000			140	
	4	99,000			165	
NF250-SW	2	97,300	250	50	105	165
	3	118,200			140	
	4	177,500			165	
NF250-SEW	3	83,400	可調整125 150	50	105	165
	4	125,000			140	
NF250-HW	2	51,600	125 150 175	100	105	165
	3	695,000			140	
	4	104,000			165	
NF250-HEW	3	86,900	可調整125 150	100	105	165
	4	131,000			140	
NF400-SW	2	122,000	250 300 350	85	140	257
	4	224,000			185	
NF400-SEW	3	164,000	可調整200 225	85	140	257
	4	246,000			185	
NF630-SW	2	264,000	500 600 630	85	140	257
	3	293,000			185	
	4	440,000			257	
NF630-SEW	3	322,000	可調整300 350	85	140	257
	4	484,000			185	
NF800-SEW	3	492,000	可調整400 450	85	210	275
	4	738,000			280	
NF1000-SEW	3	734,000	可調整500 600	125	210	406
	4	1,100,000			280	

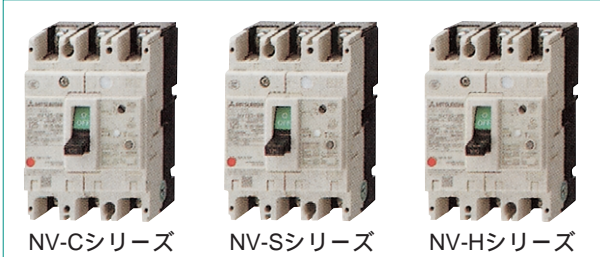

NV-Cシリーズ NV-Sシリーズ NV-Hシリーズ

NF形ノーヒューズ遮断器Cシリーズ(経済形)

形名	極数 P	価格	定格電流 (A)	遮断容量 (kA) 230V於	外形寸法	
					ヨコ	タテ
NF63-CW	2	8,130	(3) (5) 10 15	7.5	50	130
	3	11,000			75	
NF63-CW	2	10,700	60 63	7.5	50	130
	3	14,100			75	
NF125-CW	2	10,700	(50) 60 75 100	30	60	130
	3	14,100			90	
NF125-CW	2	28,330	125	30	60	130
	3	38,580			90	
NF250-CW	2	35,600	(100) 125 150	35	105	165
	3	48,400			165	
NF250-CW	2	83,510	250	35	105	165
	3	102,100			165	
NF400-CW	2	104,000	250 300 350 400	50	140	257
	3	127,000			257	
NF630-CW	2	238,000	500 600 630	50	140	257
	3	264,000			257	
NF800-CEW	3	391,000	可調整400 450 500 600 700 800	50	210	257

NV形ノーヒューズ遮断器S、Hシリーズ(汎用形、高性能形)

形名	極数 P	価格	定格電流 (A)	遮断容量 (kA) 230V於	外形寸法	
					ヨコ	タテ
NV32-SW	3	26,500	(5)(10)15 20 30 (32)	10	75	130
NV63-SW	2	27,300	(5)(10)15 20	15	75	130
	3	27,900				
NF63-SW	2	34,200	60 (63)	15	75	130
	3	34,900				
NV63-HW	3	32,000	15 20 30 40 50	25	75	130
NV63-HW	3	40,200	60 (63)	25	75	130
NV125-SW	3	98,000	15 20 30 (40) 50	50	90	130
	4	147,000			120	
NV125-SW	3	112,000	125	50	90	130
	4	123,000			120	
NV100-SEP	3	147,000	15 20 30 40 50	50	90	155
	4	147,000			120	
NV125-HW	3	112,000	(15)(20)(30)	100	90	130
	4	168,000			120	
NV100-HEF	3	140,000	15 20 30 40 50	100	90	155
	4	168,000			120	
NV250-SW	3	140,000	125 150 175	50	105	165
	4	210,000			165	
NV250-SW	3	210,600	250	50	105	165
	4	210,600			165	
NV250-SEW	3	175,000	可調整 125 150	50	105	165
	4	210,000			165	
NV250-HW	3	147,000	125 150 175 200 225	100	105	165
	4	147,000			165	
NV250-HEW	3	184,000	可調整 125 150	100	105	165
	4	221,000			165	
NV400-SW	3	262,000	250 300 350 400	85	140	257
	4	262,000			257	
NV400-SEW	3	288,000	可調整 200 225	85	140	257
	4	393,000			257	
NV400-HEW	3	389,000	可調整 200 225	100	140	257
	4	531,000			257	
NV630-SW	3	386,000	500 600 (630)	85	140	257
	4	425,000			257	
NV630-SEW	3	425,000	可調整 300 350	85	140	257
	4	579,000			257	
NV630-HEW	3	561,000	可調整 300 350 400 500 600 630	100	140	257
	4	569,000			257	
NV800-SEW	3	569,000	可調整 400 450 500 600 700 800	85	210	275
	4	768,000			275	

