


# オイルレスベアリング

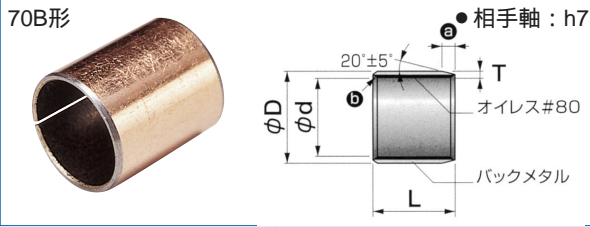

## オイルスドライメットST

(バックメタル付き含油ポリアセタール複層軸受)

- 無給油で使用でき摩擦係数が低く耐荷重に優れています。
- 往復運動、揺動運動、頻繁な起動停止など、油膜構成の困難な個所でも優れた耐摩耗性を発揮します。
- 使用温度範囲：-40 ~ +120

### ドライメットSTプッシュ 70B形寸法、価格

● ご発注要項：70B-1510

単位：mm

形番 内径×長さ	70B形 価格	内径 d	外径 D	長さ L	形番 内径×長さ	70B形 価格	内径 d	外径 D	長さ L	形番 内径×長さ	70B形 価格	内径 d	外径 D	長さ L	形番 内径×長さ	70B形 価格	内径 d	外径 D	長さ L					
0504	76	5	7	4	1715	150	17	19	15	3125	325	31	35	25	6530	960	65	70	30					
0505	76			5	1720	175			20	3140	440			40	6540	1,100			40					
0506	76			6	1810	125			10	3220	270			20	6560	1,420			20					
0508	76			8	1812	135			12	3225	325			12	7040	1,130			25					
0605	82			5	1815	160			15	3230	350			15	7060	1,560			30					
0606	82	6	8	6	1820	185	18	20	20	3240	440	32	36	40	7080	2,060	70	75	80					
0607	82			7	1825	195			25	3512	220			12	7530	1,090			12					
0608	82			8	1915	165			15	3515	235			15	7540	1,290			15					
0610	82			10	2010	140			10	3520	280			20	7560	1,740			20					
0705	82			5	2012	165			12	3525	335			12	7580	2,300			25					
0707	82	7	9	7	2015	185	20	23	15	3530	370	35	39	30	8040	1,400	80	85	40					
0710	88			10	2020	200			20	3540	470			40	8060	1,990			40					
0712	88			12	2025	220			25	3550	565			25	8080	2,690			50					
0806	88			6	2030	260			30	3820	290			20	8540	1,600			20					
0808	88			8	2210	145			10	3830	425			10	8560	2,170			30					
0810	92	8	10	12	2212	165	22	25	12	3840	530	38	42	40	8580	2,800	85	90	80					
0812	92			12	2215	185			15	3850	595			50	9040	1,800			50					
0910	98			9	11	10			2220	200	20			4012	240	12			9060	2,380	12	90	95	60
1006	98			6	2225	235			25	4020	295			25	9090	3,340			20	90	90	50		
1007	98			7	2230	260			30	4025	365			30	10050	2,560			25	100	105	70		
1008	98	10	12	8	2415	190	24	27	15	4030	425	42	44	30	10070	3,460	100	105	70					
1010	105			10	2420	210			20	4040	535			40	10095	4,480			40	95				
1012	110			12	2425	255			25	4050	645			50	11050	2,920			50	50				
1015	115			15	2430	290			30	4240	645			40	11070	3,930			40	110	115	70		
1020	120			20	2510	160			10	4250	740			10	11095	5,130			50	95				
1206	98	12	14	6	2512	175	25	28	12	4520	405	42	47	20	12050	3,580	120	125	50					
1208	98			8	2515	195			15	4525	465			25	12070	4,590			25	120	125	70		
1210	105			10	2520	220			20	4530	530			30	12095	5,970			30	95				
1212	110			12	2525	260			25	4540	660			40	13050	4,480			40	50				
1215	115			15	2530	300			30	4550	805			50	13080	6,380			50	80				
1220	125	20	2535	355	35	4560	940	60	130125	8,820	60	125												
1315	120	13	15	15	2615	210	26	30	15	5020	435	50	55	20	14050	5,970	140	145	50					
1410	115			10	2620	235			20	5030	570			30	14080	7,150			30	80				
1412	115			12	2630	310			30	5040	750			40	140100	8,590			40	100				
1415	120			15	2812	200			12	5055	1,020			55	140125	10,270			55	125				
1420	125			20	2815	210			15	5060	1,080			60	15050	5,970			60	50				
1510	115	15	17	10	2820	250	28	32	20	5065	1,260	55	60	65	15080	7,870	150	155	80					
1512	120			12	2825	290			25	5530	770			30	150100	9,060			30	100				
1515	125			15	2830	325			30	5540	940			40	150125	11,040			40	125				
1520	140			20	2840	425			40	5560	1,300			60	16050	6,800			60	50				
1525	160			25	3012	200			12	5570	1,490			70	16080	8,590			70	80				
1610	120	16	18	10	3015	220	30	34	15	6030	895	60	65	30	160100	9,790	160	165	100					
1612	125			12	3020	270			20	6040	1,010			40	160125	11,520			40	125				
1615	140			15	3025	310			25	6050	1,130			50					50					
1620	170			20	3030	335			30	6060	1,360			60					60					
1625	180			25	3040	415			40	6080	2,030			80					80					

### ドライメットSTワッシャー 70W形寸法、価格

単位：mm

### プレート70P形寸法、価格

形番 内径×厚み	70W形 価格	内径 d	外径 D	厚さ T	形番 内径×厚み	70W形 価格	内径 d	外径 D	厚さ T	形番 内径×厚み	70W形 価格	内径 d	外径 D	厚さ T	形番 厚み×長さ	70P形 価格	厚み T	幅 W	長さ L
0815	76	8	16	1.5	2315	165	23	40	1.5	4215	315	42	66	1.5	1064	5,240	1.0	120	470
1000	82	10	18	1.5	2415	175	24	42	1.5	4420	380	44	74	2.0	1067	7,850	1.0	120	720
1015	92	10	20	1.5	2615	185	26	44	1.5	4720	415	47	78	2.0	1564	5,860	1.5	120	470
1215	105	12	24	1.5	2815	200	28	48	1.5	4820	415	48	74	2.0	1567	8,860	1.5	120	720
1415	110	14	26	1.5	3215	230	32	54	1.5	5020	505	50	84	2.0	2064	6,800	2.0	120	470
1615	130	16	30	1.5	3415	220	34	58	1.5	5220	435	52	78	2.0	2067	10,520	2.0	120	720
1715	130	17	30	1.5	3615	240	36	60	1.5	5525	705	55	92	2.5	2564	8,470	2.5	120	470
1815	140	18	32	1.5	3815	280	38	62	1.5	6025	805	60	100	2.5	2567	12,870	2.5	120	720
2015	145	20	36	1.5	3915	290	39	66	1.5	6525	920	65	108	2.5					
2215	165	22	38	1.5															



空圧・油圧・真空

直動システム・関連

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境