


KCM 伝動用ローラチェーン

加賀工業(株)

231252

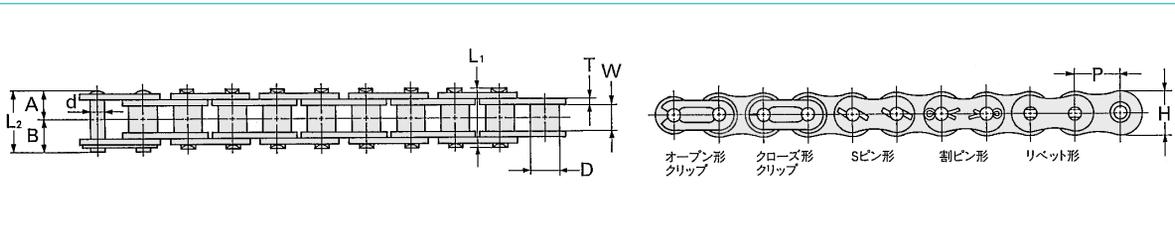

伝動用ローラチェーン仕様・価格

RIV=リベット形 COT=割ピン形

チェーンNo.	列数	定尺 (3.048m)	1m 当り	継手 CL	半駒 OL	定尺 リンク数	m当り リンク数	寸法 (mm)						ケース単位梱包数		
								ピッチP	ローラ径D	内幅W	厚さT	幅H	ピン径d	チェン	CL	OL
KCM 25	1	3,030	1,010	65	125	480	160	6.35	3.3	3.18	0.75	5.8	2.31	50	100	100
KCM 35	1	2,500	830	51	85	320	106	9.525	5.08	4.78	1.25	8.8	3.59	25	100	100
KCM 41	2	5,480	1,830	105	170									100	100	100
KCM 41	1	2,330	780	65	125	240	80	12.70	7.77	6.38	1.25	9.5	3.59	25	100	100
KCM 40	1	2,820	950	55	115									15	100	100
KCM 40	2	6,390	2,130	115	230	240	80	12.70	7.92	7.95	1.5	11.7	3.97	5	50	50
KCM 40	3	9,590	3,190	170	340									25	25	25
KCM 50	1	3,970	1,320	72	150									10	50	50
KCM 50	2	8,590	2,870	150	295	192	64	15.875	10.16	9.53	2.0	14.6	5.09	5	25	25
KCM 50	3	12,930	4,310	220	440									25	25	25
KCM 60	1	5,580	1,860	103	210									5	25	25
KCM 60	2	12,270	4,100	210	410	160	54	19.05	11.91	12.70	2.4	17.5	5.96	3	15	15
KCM 60	3	18,410	6,130	310	610									10	10	10
KCM 80RIV	1	9,410	3,130	160	310	120	40	25.40	15.88	15.88	3.2	23.0	7.94	3	20	20
KCM 80COT	1	10,750	3,590	160	310									3	20	20
KCM 80COT	2	23,730	7,910	310	610	120	40	25.40	15.88	15.88	3.2	23.0	7.94	1	10	10
KCM 80COT	3	35,580	11,870	460	920									5	5	5
KCM100RIV	1	15,240	5,080	280	520	96	32	31.75	19.05	19.05	4.0	28.9	9.54	1	10	10
KCM100COT	1	16,660	5,550	280	520									1	10	10
KCM100COT	2	37,210	12,410	550	1,020	96	32	31.75	19.05	19.05	4.0	28.9	9.54	1	5	5
KCM100COT	3	55,840	18,620	820	1,520									3	3	3
KCM120RIV	1	21,420	7,140	440	850	80	28	38.10	22.23	25.40	4.8	35.0	11.11	1	5	5
KCM120COT	1	22,540	7,520	440	850	80								1	5	5
KCM120COT	2	51,050	17,020	880	1,690	80	28	38.10	22.23	25.40	4.8	35.0	11.11	1	2	2
KCM120COT	3	76,610	25,540	1,320	2,540	40								1	1	1
KCM140COT	1	27,000	9,000	650	1,370	68								1	4	4
KCM140COT	2	61,650	20,550	1,290	2,700	34	24	44.45	25.40	25.40	5.6	40.7	12.71	1	2	2
KCM140COT	3	92,490	30,830	1,930	4,050	34								5	5	5
KCM160COT	1	34,210	11,400	850	1,700	60								1	2	2
KCM160COT	2	78,050	26,020	1,690	3,380	30	20	50.8	28.58	31.75	6.4	46.7	14.29	1	1	1
KCM160COT	3	117,110	39,040	2,540	5,060	30								4	4	4
KCM200COT	1	72,850	24,290	3,440	6,880	48								1	1	1
KCM200COT	2	161,070	53,690	6,820	13,620	24	16	63.50	39.69	38.10	8.0	58.4	19.85	1	3	3

標準ローラチェーン

チェーンNo.	列数	定尺 リンク数	定尺 価格	継手 CL	半駒 OL	ピッチ P
KCM410	1	106 ℓ	690	51	98	12.70
KCM415	1	120	1,030	55	105	12.70
KCM415S	1	120	1,600	65	130	12.70
KCM420	1	120	1,640	67	135	12.70
KCM428	1	120	1,960	88	160	12.70
KCM520	1	96	2,270	95	190	15.875
KCM525	1	96	2,270	95	190	15.875

リール巻チェーン

チェーンNo.	列数	巻数 (フィート)	価格	継手 CL	半駒 OL
KCM410	1	500	70,290	51	98
KCM415	1	400	82,320	55	105
KCM 35	1	250	62,480	51	84
KCM 40	1	200	56,490	55	115
KCM 50	1	100	39,690	72	150
KCM 60	1	100	55,760	103	210
KCM 80	1	50	47,040	160	310

リンクプレート形状の追及に始まり、すべての部品に強靱鋼を採用、疲労強度向上を極めたローラチェーンです。



高疲労強度LLシリーズローラチェーン

チェーンNo.	価格 (10Ft)	ピッチ p	内リンク 幅W	ローラ 外径D	リンクプレート 厚T 幅H	最大許容 荷重(kN)
60LL	10,330	19.05	12.70	11.91	2.4 18.0	10.79
80LL	14,090	25.40	15.88	15.88	3.2 24.0	18.63
100LL	22,540	31.75	19.05	19.05	4.0 30.0	30.40
120LL	30,990	38.10	25.40	22.23	4.8 36.0	39.23

高疲労強度HLLシリーズローラチェーン

チェーンNo.	価格 (10Ft)	ピッチ p	内リンク 幅W	ローラ 外径D	リンクプレート 厚T 幅H	最大許容 荷重(kN)
60HLL	12,410	19.05	12.70	11.91	3.2 18.0	12.75
80HLL	18,310	25.40	15.88	15.88	4.0 24.0	20.59
100HLL	29,020	31.75	19.05	19.05	4.8 30.0	32.36
120HLL	42,000	38.10	25.40	22.23	5.6 36.0	42.17



空圧・油圧・真空

直動システム・関連連

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境