



H形標準歯形形状

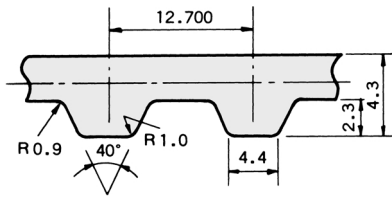

XXH形標準歯形形状

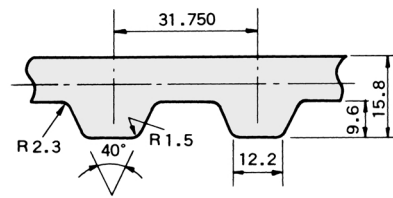

バンドーシンクロベルトH形寸法および価格

呼称	有効ピッチ周(mm)	歯数	ベルト幅 (インチ)			
			075	100	150	200
185H	469.90	37	4,020	5,190	7,550	9,890
230H	584.20	46	4,020	5,190	7,550	9,890
240H	609.60	48	4,020	5,190	7,550	9,890
245H	622.30	49	4,350	5,610	8,160	10,570
270H	685.80	54	4,350	5,610	8,160	10,570
280H	711.20	56	4,650	6,010	8,780	11,560
300H	762.00	60	4,650	6,010	8,780	11,560
320H	812.80	64	4,940	6,420	9,390	12,360
330H	838.20	66	4,940	6,420	9,390	12,360
340H	863.60	68	5,250	6,860	10,020	13,230
360H	914.40	72	5,250	6,860	10,020	13,230
370H	939.80	74	5,570	7,230	10,630	13,970
390H	990.60	78	5,570	7,230	10,630	13,970
400H	1016.00	80	5,860	7,670	11,250	14,830
410H	1041.40	82	5,860	7,670	11,250	14,830
420H	1066.80	84	5,860	7,670	11,250	14,830
450H	1143.00	90	6,240	8,100	11,920	15,700
465H	1181.10	93	6,560	8,540	12,490	16,450
480H	1219.20	96	6,560	8,540	12,490	16,450
490H	1244.60	98	6,730	8,780	12,850	17,050
510H	1295.40	102	6,730	8,780	12,850	17,050
530H	1346.20	106	7,170	9,340	13,730	18,170
540H	1371.60	108	7,170	9,340	13,730	18,170
560H	1422.40	112	7,360	9,640	14,220	18,670
570H	1447.80	114	7,360	9,640	14,220	18,670
580H	1473.20	116	7,720	10,200	14,960	19,780
600H	1524.00	120	7,720	10,200	14,960	19,780
605H	1536.70	121	8,160	10,440	15,460	20,390
630H	1600.20	126	8,160	10,440	15,460	20,390
650H	1651.00	130	8,400	11,010	16,190	21,510
660H	1676.40	132	8,400	11,010	16,190	21,510
700H	1778.00	140	8,780	11,560	17,050	22,500

呼称	有効ピッチ周(mm)	歯数	ベルト幅 (インチ)			
			075	100	150	200
750H	1905.00	150	9,210	12,110	17,930	23,610
760H	1930.40	152	9,830	12,980	19,160	25,340
770H	1955.80	154	9,830	12,980	19,160	25,340
800H	2032.00	160	9,830	12,980	19,160	25,340
810H	2057.40	162	10,260	13,480	20,020	26,440
820H	2082.80	164	10,260	13,480	20,020	26,440
840H	2133.60	168	10,260	13,480	20,020	26,440
850H	2159.00	170	10,260	13,480	20,020	26,440
860H	2184.40	172	10,880	14,330	21,140	28,060
900H	2286.00	180	10,880	14,330	21,140	28,060
950H	2413.00	190	11,920	15,700	23,230	30,780
985H	2501.90	197	11,920	15,700	23,230	30,780
1000H	2540.00	200	11,920	15,700	23,230	30,780
1020H	2590.80	204	12,980	17,050	25,340	33,620
1050H	2667.00	210	12,980	17,050	25,340	33,620
1100H	2794.00	220	12,980	17,050	25,340	33,620
1140H	2895.60	228	14,590	19,160	28,420	37,700
1250H	3175.00	250	14,590	19,160	28,420	37,700
1350H	3429.00	270	16,070	21,250	31,530	41,900
1400H	3556.00	280	16,070	21,250	31,530	41,900
1700H	4318.00	340	19,160	25,210	37,700	49,930

バンドーシンクロベルトXXH形寸法および価格

呼称	有効ピッチ周(mm)	歯数	ベルト幅 (インチ)			
			200	300	400	500
700XXH	1778.00	56	45,360	64,260	83,050	102,210
800XXH	2032.00	64	49,690	70,440	91,200	112,210
900XXH	2286.00	72	54,010	76,760	99,360	122,230
1000XXH	2540.00	80	57,340	82,930	107,400	132,360
1200XXH	3048.00	96	66,000	95,400	123,720	151,890

呼称	有効ピッチ周(mm)	歯数	ベルト幅 (インチ)			
			200	300	400	500
1400XXH	3556.00	112	74,530	107,900	139,900	172,900
1600XXH	4064.00	128	83,180	120,370	156,090	193,170
1800XXH	4572.00	144	92,440	132,730	173,150	213,430
1915XXH	4857.75	153	101,220	145,960	189,960	233,210

印は、RMA規格(米国)の標準サイズです。H形のベルト幅300、XXH形ベルト幅600についてはお問い合わせ下さい。XH、XXH形の価格はグラスファイバーコードの価格です。高負荷用シンクロベルト(スチールケーブルコード)の価格は別途御見積り致します。

空圧・油圧・真空

直動システム・関連

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動 **7**

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境