

アタッチメント付チェーン

(株)橋本チエン


205151

ステンレスローラチェーンSS形

チェーン No	価格		継手 JL	半駒 OL	1ユニット リンク数	m当り リンク数
	1ユニット	1リンク				
RS 11-SS-1	6,700	50	197		134	268
RS 25-SS-1	4,480	28	178		160	160
RS 35-SS-1	15,360	48	236	400	320	106
RS 40-SS-1	15,600	65	240	498	240	80
RS 40-SS-2		145	581	1,200		
RS 50-SS-1	19,776	103	293	583	192	
RS 50-SS-2		227	708	1,400		64
RS 60-SS-1	26,880	168	448	893	160	54
RS 60-SS-2		378	1,080	2,170		
RS 80-SS-1	44,520	371	583	1,200	120	40
RS 80-SS-2		824	1,400	2,930		
RS100-SS-1	126,720	1,320	1,760	4,430		
RS100-SS-2		2,880	4,280	10,700		32

ステンレスローラチェーンAS形

チェーン No	価格		継手 JL	半駒 OL	1ユニット リンク数	m当り リンク数
	1ユニット	1リンク				
RS40-AS-1	21,600	90	310	653	240	80
RS50-AS-1	26,496	138	378	756	192	64
RS60-AS-1	35,680	223	583	1,170	160	54
RS80-AS-1	58,200	485	756	1,620	120	40

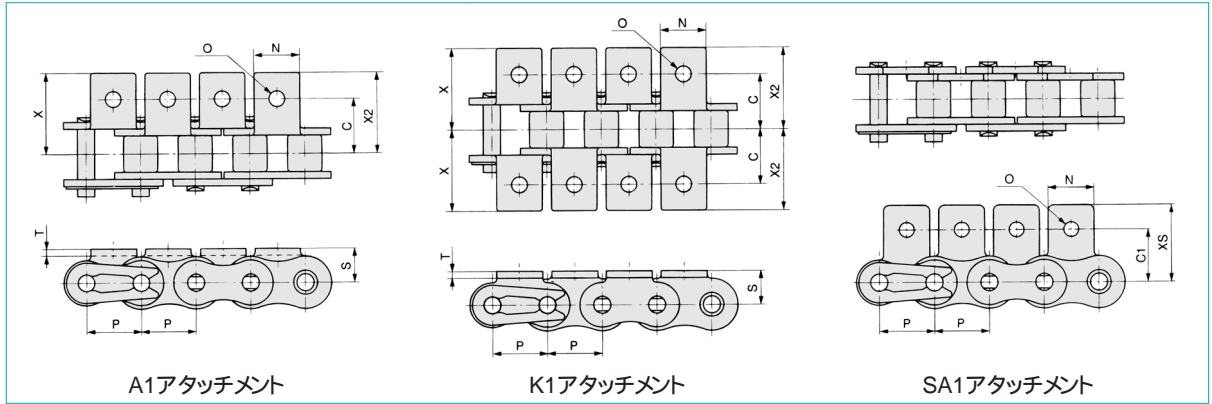

RSアタッチメント付チェーン寸法および価格

下記価格はすべて1リンク当りの価格です

チェーン No	A K	每LA1 毎LK1	2LA1 2LK1	3LA1 3LK1	4LA1 4LK1	A1・SA1 JL	K1・SK1 JL	主要寸法 (mm)								
								C	Cl	N	O	S	T	X	X2	XS
RS 35	A	41	33	29	27	136	213	9.5	9.5	7.9	3.4	6.35	1.25	14.3	14.3	14.55
	K	67	41	35	33											
RS 40	A	60	48	46	41	184	251	12.7	12.7	9.5	3.6	8.0	1.5	17.8	17.8	17.40
	K	78	60	51	48											
RS 50	A	82	69	66	59	213	305	15.9	15.9	12.7	5.2	10.3	2.0	23.4	23.4	23.05
	K	100	82	75	69											
RS 60	A	108	94	87	80	278	391	19.05	18.3	15.9	5.2	11.9	2.4	28.2	28.2	26.85
	K	138	108	102	94											
RS 80	A	205	187	178	166	375	478	25.4	24.6	19.1	6.8	15.9	3.2	36.6	36.6	35.45
	K	246	205	192	187											
RS100	A	436	398	382	370	769	1,000	31.75	31.8	25.4	8.7	19.8	4.0	44.9	44.9	44.00
	K	514	436	415	398											
RS120	A	969	837	798	760	1,830	2,310	38.1	36.5	28.6	10.3	23.0	4.8	55.8	50.8	52.9
	K	1,270	969	931	837								5.0	56.7	51.5	
RS140	A	1,280	1,120	1,050	998	2,340	2,880	44.5	44.5	34.9	11.9	28.6	5.6	63.1	57.2	63.50
	K	1,560	1,280	1,210	1,120								6.0	64.6	58.0	
RS160	A	1,690	1,510	1,450	1,380	3,190	3,910	50.8	50.8	38.1	14.3	31.8	6.4	71.8	65.1	70.10
	K	2,110	1,690	1,640	1,510								7.0	73.7	66.0	

RSアタッチメント付ラムダチェーン(無給油チェーン)

RSアタッチメント付ステンレスチェーン(SS仕様)

チェーン No	A K	每LA1 毎LK1	2LA1 2LK1	3LA1 3LK1	4LA1 4LK1	A1・SA1 JL	K1・SK1 JL
RS40-LMC	A	99	86	83	81	193	253
	K	116	99	88	86		
RS50-LMC	A	133	122	119	113	223	312
	K	152	133	127	122		
RS60-LMC	A	187	172	167	160	296	385
	K	215	187	181	172		
RS80-LMC	A	353	335	327	320	445	534
	K	393	353	341	335		
RS100-LMC	A	628	593	582	572	831	1,070
	K	699	628	611	593		

チェーン No	A K	每LA1 毎LK1	2LA1 2LK1	3LA1 3LK1	4LA1 4LK1	A1・SA1 JL	K1・SK1 JL
RS 40SS	A	138	120	113	110	360	388
	K	157	138	125	120		
RS 50SS	A	199	178	172	168	413	457
	K	227	199	185	178		
RS 60SS	A	286	251	240	233	574	632
	K	343	286	258	251		
RS 80SS	A	655	611	581	577	968	1,090
	K	688	655	622	611		
RS100SS	A	1,700	1,630	1,580	1,570	2,150	2,390
	K	1,860	1,700	1,660	1,630		

空圧・油圧・真空
直動システム・関連
ロボット・FA
制御・検出・計測
駆動・回転
軸受・素材・機械
動力伝達・伝動
搬送・運搬
ポンプ・送風機・粉体
工場設備・環境