



寸法図

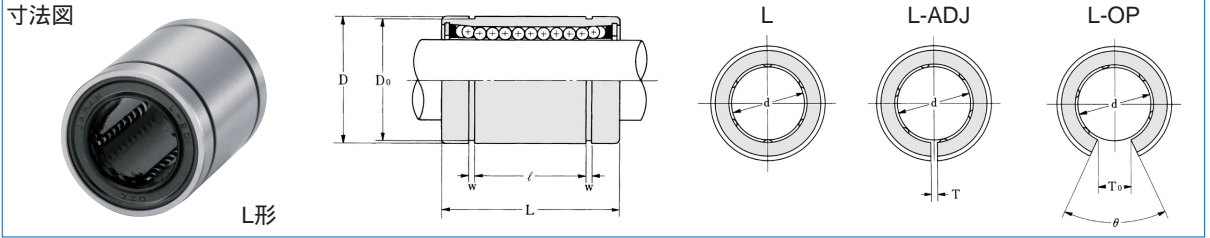

Lシリーズリニアベアリング寸法および価格

型番	価格		主要寸法 (mm)			基本定格荷重 (N)		型番	価格		主要寸法 (mm)			基本定格荷重 (N)	
	シールなし	シール付(UU)	d	D	L	C	Co		シールなし	シール付(UU)	d	D	L	C	Co
L3	1,460	1,760	3	7	10	45	40	L20	1,360	1,620	20	32	42	1282	1010
L4	1,210	1,450	4	8	12	59	60	L25A	2,070	2,330	25	40	55	2164	1790
L5	1,210	1,450	5	10	15	123	110	L25B	2,070	2,330	25	40	59	2164	1790
L6	770	920	6	12	19	218	160	L30	2,780	3,180	30	45	64	3245	2510
L8A	720	870	8	15	17	258	220	L35	3,490	4,010	35	52	70	3521	3090
L8B	750	900	8	15	24	258	220	L40	4,940	5,400	40	60	80	4844	4040
L10	770	910	10	19	29	532	430	L50	6,250	6,780	50	80	100	8272	6430
L12	810	970	12	21	30	549	430	L60	9,770	10,470	60	90	110	9847	7270
L13	840	1,000	13	23	32	555	440								
L16	1,000	1,240	16	28	37	768	650								

寸法図

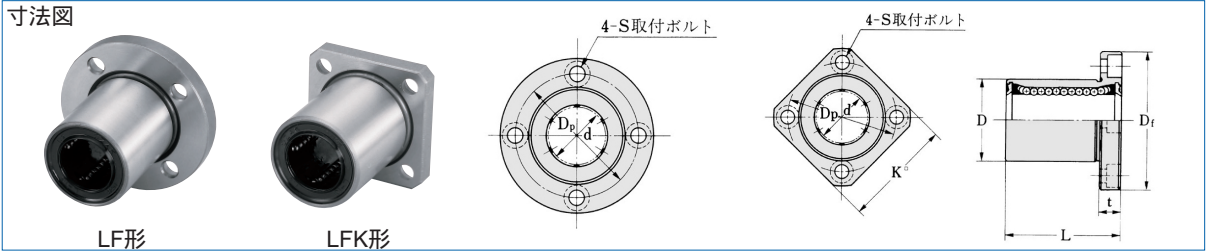

LF形・LFK形リニアベアリング寸法および価格

型番 (標準型)	LF・LFK価格		型番 (防錆型)	MLF・MLFK価格		主要寸法 (mm)								基本定格荷重 (N)	
	シールなし	シール付(UU)		シールなし	シール付(UU)	d	D	L	Df	K	t	Dp	S	C	Co
LF6	1,310	1,440	MLF6	2,840	3,320	6	12	19	28	22	5	20	M3	218	160
LFK6	1,430	1,560	MLFK6	3,400	3,880	8	16	25	32	25	5	24	M3	258	220
LF8	1,310	1,440	MLF8	2,840	3,330	8	15	24	32	25	5	24	M3	258	220
LFK8	1,430	1,560	MLFK8	3,400	3,900	10	19	29	39	30	6	29	M4	532	430
LF8B	1,310	1,440	MLF8B	2,840	3,330	12	22	32	42	32	6	32	M4	549	430
LFK8B	1,430	1,560	MLFK8B	3,400	3,900	12	21	30	42	32	6	32	M4	549	430
LF10	1,340	1,480	MLF10	2,930	3,440	13	23	32	43	34	6	33	M4	555	440
LFK10	1,470	1,610	MLFK10	3,520	4,040	16	26	36	46	35	6	36	M4	768	650
LF12	1,440	1,580	MLF12	3,130	3,660	16	28	37	48	37	6	38	M4	768	650
LFK12	1,570	1,720	MLFK12	3,760	4,290	20	32	42	54	42	8	43	M5	1282	1010
LF12B	1,440	1,580	MLF12B	3,130	3,660	25	40	58	62	50	8	51	M5	2164	1790
LFK12B	1,570	1,720	MLFK12B	3,760	4,290	30	47	64	76	60	10	62	M6	3245	2510
LF13	1,590	1,750	MLF13	3,460	4,000	30	45	64	74	58	10	60	M6	3245	2510
LFK13	1,740	1,900	MLFK13	4,150	4,690	35	52	70	82	64	10	67	M6	3521	3090
LF16	1,830	2,010	MLF16	3,990	4,560	40	60	80	96	75	13	78	M8	4844	4040
LFK16	2,000	2,180	MLFK16	4,780	5,360	50	80	100	116	92	13	98	M8	8272	6430
LF16B	1,830	2,010	MLF16B	3,990	4,560	60	90	110	134	106	18	112	M10	9847	7270
LFK16B	2,000	2,180	MLFK16B	4,780	5,360										
LF20	2,220	2,430	MLF20	4,830	5,450										
LFK20	2,430	2,650	MLFK20	5,800	6,420										
LF25	3,190	3,440	MLF25	6,960	7,640										
LFK25	3,510	3,740	MLFK25	8,360	9,040										
LF30	4,510	4,810	MLF30	9,830	10,600										
LFK30	4,930	5,230	MLFK30	11,800	12,600										
LF30B	4,510	4,810	MLF30B	9,830	10,600										
LFK30B	4,930	5,230	MLFK30B	11,800	12,600										
LF35	5,760	6,120	MLF35	12,600	13,400										
LFK35	6,300	6,670	MLFK35	15,100	15,900										
LF40	7,450	7,910	MLF40	16,300	17,200										
LFK40	8,190	8,650	MLFK40	19,500	20,500										
LF50	10,120	10,670	MLF50	22,800	23,300										
LFK50	11,040	11,590	MLFK50	27,200	27,700										
LF60	14,540	15,180	MLF60	32,800	33,400										
LFK60	15,920	16,560	MLFK60	34,200	34,800										

空圧・油圧・真空

直動システム・開通

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境

