

FLWL形




FLWL-H形



FLWL-B形



寸法図

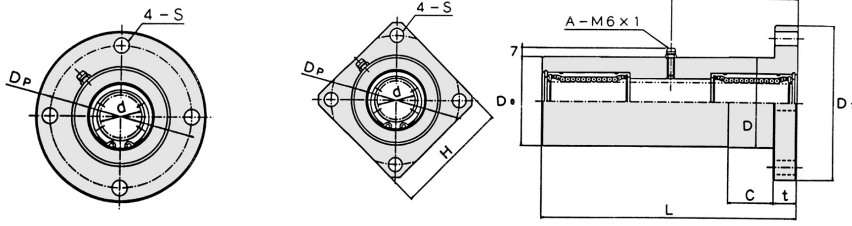


FLWL16以上(以下は給油ニップルなし)

**FLWL形・FLWL-H形/FLWL-S形・FLWL-HS形 ステンレスベアリング ロングスリーブ形** ハウジング:アルミ

型番 (標準型)	FLWL	FLWL-H	型番 (ステンレスベアリング)	FLWL-S	FLWL-HS	主要寸法(mm)											取付	
						d	D <sup>h7</sup>	D <sub>0</sub>	L	D <sub>f</sub>	H	t	C	D <sub>p</sub>	S	ボルト		
FLWL6-75	4,800	5,600	FLWL 6S- 75	7,200	8,000	6	20	19	75	40	30	8	16	30	6	M 5		
FLWL8-100	5,200	6,000	FLWL 8S-100	8,400	9,200	8	24	23	100	46	35	8	16	35	6	M 5		
FLWL10-125	5,600	6,400	FLWL10S-125	8,800	9,600	10	30	29	125	54	42	10	20	42	7	M 6		
FLWL12-125	6,400	7,200	FLWL12S-125	10,000	10,800	12	34	33	125	56	44	10	20	45	7	M 6		
FLWL13-125	6,400	7,200	FLWL13S-125	10,000	10,800	13	34	33	125	56	44	10	20	45	7	M 6		
FLWL16-150	7,200	8,400	FLWL16S-150	11,600	12,800	16	45	44	150	80	60	11	22	60	7	M 6		
FLWL20-150	8,000	9,200	FLWL20S-150	13,200	14,400	20	50	49	150	90	66	12	24	70	9	M 8		
FLWL20-200	8,800	10,000	FLWL20S-200	14,000	15,200	20	50	49	200	90	66	12	24	70	9	M 8		
FLWL25-200	12,000	13,600	FLWL25S-200	20,400	21,200	25	60	59	200	100	74	15	30	80	11	M10		
FLWL25-250	12,800	14,400	FLWL25S-250	21,200	22,800	25	60	59	250	100	74	15	30	80	11	M10		
FLWL30-200	15,200	17,600	FLWL30S-200	25,200	25,600	30	70	69	200	120	90	18	36	100	11	M10		
FLWL30-250	16,000	18,400	FLWL30S-250	25,600	26,000	30	70	69	250	120	90	18	36	100	11	M10		
FLWL30-300	18,400	20,800	FLWL30S-300	28,400	28,800	30	70	69	300	120	90	18	36	100	11	M10		
FLWL40-250	27,200	31,200	FLWL40S-250	48,400	50,000	40	90	89	250	160	126	20	40	130	14	M12		
FLWL40-300	29,600	33,600	FLWL40S-300	50,800	54,800	40	90	89	300	160	126	20	40	130	14	M12		
FLWL50-300	42,400	47,200	FLWL50S-300	83,600	88,400	50	120	119	300	190	150	20	40	160	14	M12		
FLWL50-350	47,200	52,000	FLWL50S-350	88,400	93,200	50	120	119	350	190	150	20	40	160	14	M12		

寸法図

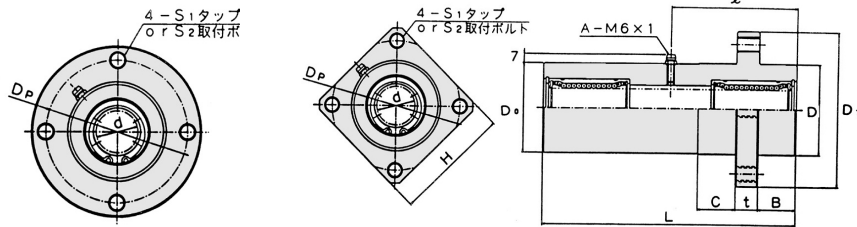

**FLWL-B形・FLWL-HB形/FLWL-BS形・FLWL-HBS形 ステンレスベアリング ロングスリーブ + ボス付形**

型番 (標準型)	FLWL-B	FLWL-HB	型番 (ステンレスベアリング)	FLWL-BS	FLWL-HBS	主要寸法(mm)											取付	
						d	D <sup>h7</sup>	D <sub>0</sub>	L	D <sub>f</sub>	H	t	B	C	D <sub>p</sub>	S <sub>1</sub>	S <sub>2</sub>	
FLWL16B-150	8,000	9,200	FLWL16BS-150	12,400	13,600	16	45	44	150	80	60	11	20	20	60	M8	M6	
FLWL20B-150	9,600	10,800	FLWL20BS-150	14,800	15,200	20	50	49	150	90	66	12	20	20	70	M10	M8	
FLWL20B-200	10,400	11,600	FLWL20BS-200	15,600	16,800	20	50	49	200	90	66	12	30	30	70	M10	M8	
FLWL25B-200	13,600	15,200	FLWL25BS-200	20,000	20,800	25	60	59	200	100	74	15	30	30	80	M12	M10	
FLWL25B-250	14,400	16,000	FLWL25BS-250	22,400	23,200	25	60	59	250	100	74	15	40	40	80	M12	M10	
FLWL30B-200	17,600	18,400	FLWL30BS-200	24,800	25,600	30	70	69	200	120	90	18	30	30	100	M12	M10	
FLWL30B-250	18,400	19,200	FLWL30BS-250	25,200	26,000	30	70	69	250	120	90	18	40	40	100	M12	M10	
FLWL30B-300	20,000	20,800	FLWL30BS-300	27,600	28,400	30	70	69	300	120	90	18	50	50	100	M12	M10	
FLWL40B-250	31,200	33,600	FLWL40BS-250	48,000	48,800	40	90	89	250	160	126	20	40	40	130	M14	M12	
FLWL40B-300	33,600	36,800	FLWL40BS-300	53,200	54,000	40	90	89	300	160	126	20	50	50	130	M14	M12	
FLWL50B-300	47,200	52,000	FLWL50BS-300	88,400	93,200	50	120	119	300	190	150	20	50	50	160	M14	M12	
FLWL50B-350	52,000	56,000	FLWL50BS-350	93,200	97,200	50	120	119	350	190	150	20	60	60	160	M14	M12	

空圧・油圧・真空

直動システム・関連

ロボット・FA

制御・検出・計測

駆動・回転

軸受・素材・機械

動力伝達・伝動

搬送・運搬

ポンプ・送風機・粉体

工場設備・環境