



ファイバセンサ用途例


大型基板の検出 (FT-B8)

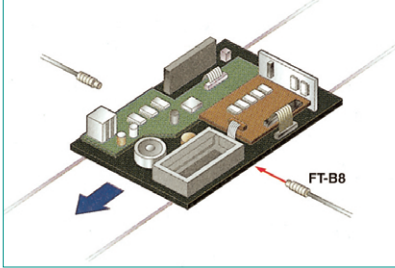

コンパクトディスクの2枚重なり検出 (FT-A8)

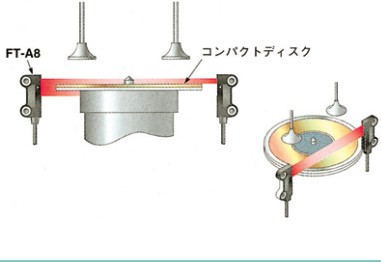

シロップ容器の位置決め (FD-G4)

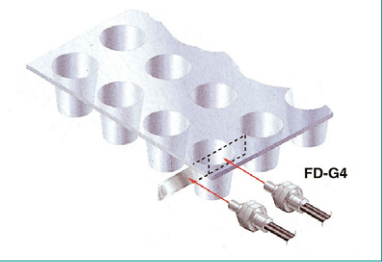

ファイバ一覧透過型(2本セット)



型式名	価格	種類	先端形状 (mm)	検出距離 (mm)			ファイバ長 フリーカット	曲げ半径 (mm)		
				赤色光	青色光	緑色光				
FT-B8	5,860	ネジ型	レンズ装着可 M4	440 (U-LG), 220 (STD), 530 (FAST), 400 (FAST)	110 (U-LG), 55 (STD), 75 (FAST), 40 (FAST)	120 (U-LG), 30 (STD), 40 (FAST), 22 (FAST)	2m	R25		
FT-FM2	3,900		レンズ装着可 M4	440 (U-LG), 150 (STD), 340 (FAST), 240 (FAST)	230 (U-LG), 60 (STD), 40 (FAST), 22 (FAST)	120 (U-LG), 30 (STD), 22 (FAST), 18 (FAST)				
FT-W8	8,040		レンズ装着可 M4	440 (U-LG), 950 (STD), 290 (FAST), 200 (FAST)	170 (U-LG), 45 (STD), 30 (FAST), 18 (FAST)	100 (U-LG), 26 (STD), 18 (FAST), 18 (FAST)				
FT-P81X	14,300		レンズ装着可 M4 メタルジャケット	440 (U-LG), 1,200 (STD), 320 (FAST), 230 (FAST)	240 (U-LG), 64 (STD), 45 (FAST), 22 (FAST)	120 (U-LG), 32 (STD), 22 (FAST), 18 (FAST)			1m	R10
FT-NFM2	3,900		M3	レンズ装着可 M3	440 (U-LG), 450 (STD), 130 (FAST), 85 (FAST)	85 (U-LG), 20 (STD), 14 (FAST), 7 (FAST)			38 (U-LG), 10 (STD), 7 (FAST), 7 (FAST)	2m
FT-W4	8,720	レンズ装着可 M3		440 (U-LG), 250 (STD), 65 (FAST), 45 (FAST)	35 (U-LG), 8 (STD), 5 (FAST), 3 (FAST)	34 (U-LG), 5 (STD), 3 (FAST), 3 (FAST)	2m	R1		
FT-WA8	19,890	特殊 スクリーン		ワイドエリアで検出 検出幅11mm W4.2XH31XD13.5	900 (U-LG), 3,500 (STD), 1,500 (FAST), 1,100 (FAST)	900 (U-LG), 300 (STD), 220 (FAST), 110 (FAST)	400 (U-LG), 150 (STD), 110 (FAST), 110 (FAST)	2m	R1	
FT-A8	15,200		ワイドエリアで検出 検出幅11mm W4.2XH31XD13.5	900 (U-LG), 3,500 (STD), 1,500 (FAST), 1,100 (FAST)	900 (U-LG), 300 (STD), 220 (FAST), 110 (FAST)	400 (U-LG), 150 (STD), 110 (FAST), 110 (FAST)	2m	R10		

ファイバ一覧反射型



型式名	価格	種類	先端形状 (mm)	検出距離 (mm)			ファイバ長 フリーカット	曲げ半径 (mm)		
				赤色光	青色光	緑色光				
FD-B8	5,860	ネジ型	M6	180 (U-LG), 650 (STD), 120 (FAST)	160 (U-LG), 40 (STD), 26 (FAST)	86 (U-LG), 21 (STD), 14 (FAST)	2m	R25		
FD-FM2	3,900		同軸 M6	110 (U-LG), 460 (STD), 80 (FAST)	90 (U-LG), 23 (STD), 15 (FAST)	46 (U-LG), 12 (STD), 8 (FAST)				
FD-W8	8,040		M6	70 (U-LG), 300 (STD), 50 (FAST)	53 (U-LG), 11 (STD), 8 (FAST)	28 (U-LG), 7 (STD), 4 (FAST)			R1	
FD-P81X	11,700		M6 メタルジャケット	280 (U-LG), 80 (STD), 55 (FAST)	70 (U-LG), 16 (STD), 10 (FAST)	32 (U-LG), 8 (STD), 5 (FAST)			1m	R10
FD-NFM2	3,900		M4	40 (U-LG), 170 (STD), 30 (FAST)	35 (U-LG), 8 (STD), 5 (FAST)	16 (U-LG), 4 (STD), 2 (FAST)			2m	R25
FD-WG4	8,040	M4	同軸・レンズ装着可	32 (U-LG), 150 (STD), 25 (FAST)	26 (U-LG), 5 (STD), 3 (FAST)	12 (U-LG), 3 (STD), 2 (FAST)	2m	R2		
FD-G4	8,300	M3	M4	52 (U-LG), 220 (STD), 38 (FAST)	48 (U-LG), 11 (STD), 8 (FAST)	20 (U-LG), 5 (STD), 3 (FAST)	2m	R25		
FD-G6X	13,000		レンズ装着可 (FX-MR3, FX-MR6) 同軸 M3 メタルジャケット	45 (U-LG), 200 (STD), 35 (FAST)	50 (U-LG), 11 (STD), 6 (FAST)	22 (U-LG), 6 (STD), 4 (FAST)	1m	R10		